

Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11) **EP 1 182 788 A1**

(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:  
27.02.2002 Bulletin 2002/09

(51) Int Cl.7: **H04B 1/10**

(21) Application number: **01301959.1**

(22) Date of filing: **05.03.2001**

(84) Designated Contracting States:  
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU  
MC NL PT SE TR**  
Designated Extension States:  
**AL LT LV MK RO SI**

- Kolsrud, Arild  
Bridgewater, New Jersey 08807 (US)
- Kumar, Sanjay  
Parsippany, New Jersey 07054 (US)
- Pagano II, Carmine James  
Blairstown, New Jersey 07825 (US)

(30) Priority: **22.08.2000 US 643647**

(71) Applicant: **LUCENT TECHNOLOGIES INC.**  
Murray Hill, New Jersey 07974-0636 (US)

(74) Representative:  
Buckley, Christopher Simon Thirsk et al  
Lucent Technologies (UK) Ltd, 5 Mornington  
Road  
Woodford Green, Essex IG8 0TU (GB)

(72) Inventors:  
• Dimeo, Richard W.  
Randolph, New Jersey 07869 (US)

(54) **Adjacent frequency amplitude reduction system and method**

(57) A band edge amplitude reduction system changes the filtering characteristics of a receiver based on the amplitude of signal(s) adjacent to an edge of the operating band of the receiver and/or of signals not under the power control of the receiver. For example, the receiver measures the power level over a bandwidth at the band edges of the operating band of the receiver. If the signals adjacent to the operating band are strong enough relative to the signal power within the operating band, overload protection circuitry changes the filtering

characteristics of the receiver to improve the attenuation of the signal(s) from the adjacent band(s). In certain embodiments, the overload protection circuitry switches in filter(s) with a narrower bandwidth to attenuate the signal(s) from adjacent band(s) at the edge(s) of the operating band of the receiver, thereby preventing interference with or the overload of the receiver by signals from outside the operating band and/or not under the power control of the receiver.

EP 1 182 788 A1

## Description

### BACKGROUND OF THE INVENTION

#### 1. Field of Th Invention

[0001] This invention relates to a wireless communications and, more particularly, to a band edge power cancellation scheme to reduce interference in a wireless communications system.

#### 2. Description of Related Art

[0002] The service area of a wireless communication system is partitioned into connected service domains known as cells, where wireless units communicate via radio links with a base station (BS) serving the cell. The base station is coupled to a land network, for example through a Mobile Switching Center (MSC) which is connected to a plurality of base stations dispersed throughout the service area. In the wireless communications industry, a service provider is often granted two or more non-contiguous or segregated frequency bands to be used for the wireless transmission and reception of RF communications channels. For example, in the United States, a base station for an "A" band provider for cellular communications receives frequency channels within the A (825-835 MHz), A' (845-846.5 MHz) and A" (824-825MHz) bands, and the wireless units receive frequency channels within the A (870-880 MHz), A' (890-891.5 MHz) and A" (869-870MHz) bands. A base station for a B band provider receives frequency channels within the B (835-845MHz) and B' (846.5-849 MHz) frequency bands, and the wireless units receive frequency channels within the B (880-890MHz) and B' (891.5-894 MHz) frequency bands. Additionally, a base station for a Personal Communications Systems (PCS) provider may receive frequency channels from wireless units on one or more PCS bands (1850MHz-1910MHz), and the wireless units receive frequency channels on one or more PCS bands (1930-1990 MHz).

[0003] To improve system performance and increase system capacity, the power levels transmitted by the wireless units and/or the base stations are controlled. Power control is generally done by the receiving unit or station measuring the signal strength from the transmitting station or unit. The receiving unit or station can adjust its transmit power based on the received signal strength, and/or the receiving unit or station can relay power control information to the transmitting unit which adjusts its transmit power level in response to the power control information. The power level transmitted by every wireless unit is typically under the control of the serving base station, and the base station performs power control to reduce the power level that each wireless unit is transmitting while maintaining a good quality reverse link. By decreasing the power level that each wireless unit is transmitting, system-wide interference created by

the transmissions of the wireless units is reduced. Such a scenario allows increased capacity for the wireless cellular communications system because as the transmit powers are decreased, the overall signal to interference ratio decreases for all wireless units in the wireless cellular communications system.

[0004] Since frequency bands of adjacent cells and/or adjacent wireless communications systems are not under the power control of the same base station, there is a possibility that one or more signals/carriers from another cell that are close to the operating frequency band of a base station might be too strong in power and overload the radio receiver circuitry in the base station. For example, in order to reduce system hardware costs, a service provider would want to use common receivers for the simultaneous reception and processing of signals within the non-contiguous frequency bands. Typically, an automatic gain control (AGC) at the front-end of the receiver is effective in protecting the base station from overload but at the expense of any users at the fringe of the cell.

[0005] However, due to the finite roll-off characteristics of filters in the radio receiver, a signal from an adjacent band may come through the radio receiver at a power level strong enough to saturate the wideband analog to digital (A/D) converter. The A/D converter is the most critical component to protect against overload in a modern cellular radio receiver. The A/D converter does not operate in a soft clipping manner as is the case with amplifiers, mixers and other analog semiconductor devices. Once the A/D converter is saturated (i.e., input signal is above the full scale resolution of the A/D), the digital output code cannot go above the maximum binary number limited by the resolution in bits. The sudden change (or sudden stop/clipping) in binary output pattern from the A/D converter, which digitizes and tracks the analog input signal, is called a discontinuity and results in a massive spurious response in the digital domain (when a Fourier transform is taken of the supposed analog input signal with a sudden clipping of the amplitude).

[0006] It is necessary to implement some overload protection in order to prevent saturation of the A/D converter.

### SUMMARY OF THE INVENTION

[0007] The present invention is a band edge amplitude reduction system which changes the filtering characteristics of a receiver based on the amplitude of signal (s) adjacent to an edge of the operating band of the receiver and/or of signals not under the power control of the receiver. For example, the receiver measures the power level over a bandwidth at the band edges of the operating band of the receiver. If the signals adjacent to the operating band are strong enough relative to the signal power within the operating band, overload protection circuitry changes the filtering characteristics of the re-

ceiver to improve the attenuation of the signal(s) from the adjacent band(s). In certain embodiments, the overload protection circuitry switches in filter(s) with a narrower bandwidth to attenuate the signal(s) from adjacent band(s) at the edge(s) of the operating band of the receiver, thereby preventing interference with or the overload of the receiver by signals from outside the operating band and/or not under the power control of the receiver.

## BRIEF DESCRIPTION OF THE DRAWINGS

[0008] Other aspects and advantages of the present invention may become apparent upon reading the following detailed description and upon reference to the drawings in which:

FIG. 1 shows a general block diagram of a receiver using the band edge amplitude reduction circuitry according to the principles of the present invention; and

FIG. 2 shows a block diagram of an alternative embodiment of a receiver using the band edge amplitude reduction circuitry according to the principles of the present invention.

## DETAILED DESCRIPTION

[0009] Illustrative embodiments of a receiver system using the band edge power reduction circuitry according to the principles of the present invention is described below. With particular reference to FIG. 1, a receiver 10 includes an antenna(s) 12 which receives radio frequency (RF) analog signals which are filtered by a RF band-pass filter 14 to produce an operating frequency band for the receiver 10. The output of the RF filter 14 is provided to an amplifier 16, such as a low noise amplifier for amplification. The radio front-end is comprised of at least the antenna 12, the RF filter 14 and the amplifier 16. A replica of the operating frequency band is provided to a band edge detection path 18 for detection by band edge power detector circuitry 20. The band edge power detection circuitry 20 measures at least one amplitude, such as power level, for a bandwidth(s) adjacent to or at the edge(s) relative to the operating frequency band and/or from signals not under the control of the receiver 10. For example the power level(s) of a narrow band(s) of frequencies adjacent to or at the edge of the frequency band of operation, such as a narrow band from 30 KHz to 1 MHz wide using a SAW, lumped-element or other type of filter. As a function of the rogue, unwanted or interfering amplitude(s), processing circuitry 22 provides control signals to change the filtering characteristics of a variable filter 24 to attenuate the amplitude, for example the interference, at the band edge(s) of the frequency band of operation. Band edge can refer to a bandwidth that is adjacent to and/or encompasses an edge of the frequency band of operation.

[0010] Depending on the embodiment, the processing circuitry 22 can make a comparison between the amplitude(s) at the band edge(s) and an amplitude, such as a power level, provided by an analog amplitude indicator 26a or a digital amplitude indicator 26b for the frequency band of operation or a portion thereof. Based on the comparison, the processing circuitry 22 can provide control signals to the variable filter 24 to change the filtering characteristics of the variable filter 24. For example, the control signals control switches 28 and 30 which switch the received signals between filters 32a-b in a filter bank 34. As a function of the amplitude(s) at band edge(s) adjacent to the frequency band of operation, the processing circuitry 22 can cause the switching between filters 32a-b to narrow the band (for example, from 15 to 13 MHz or from 5 MHz to 3 MHz) passed through the variable filter 24 at either or both band edges to attenuate the amplitude, such as power level or interference at the band edge(s), such as power from adjacent frequency bands from wireless units (not shown) and/or not under the power control of the receiver 10.

[0011] In alternative embodiments, the processing circuitry 22, such as a micro-controller and A/D converter, can provide control signal(s) to control the variable filter 24 as a function of the amplitude of signals not under the control of the receiver 10, for example by comparing the amplitude of signals under the control of the receiver 10 and the total amplitude of signals within the frequency band of operation. Alternatively, the amplitude of signals not under the control of the receiver 10 can be assumed and cause a change in the filtering characteristics of the receiver 10 if the processing circuitry 22 receives an indication of overload or saturation, for example by receiving an overload signal from the A/D 35. Furthermore, alternative embodiments for the variable filter 24 are possible for which the filtering characteristics can change using control signal(s) from the processing circuitry 22. For example, a programmable filter, a programmable array of filter elements, a varactor-tuned filter and/or a tunable cavity filter could be used.

[0012] In the embodiment shown in FIG. 1, RF analog signals are received by the antenna 12 and the radio front end onto a main signal path 40. A coupler 42 provides a replica of the RF analog signals on the main signal path 40 directly from the radio front end at radio frequency (RF) onto the band edge detection path 18 for the band edge detection circuitry 20. The band edge detection circuitry 20 receives the RF spectrum from the band edge detection path 18, and an amplifier 44 amplifies the RF analog signals on the path 18. The RF analog signals are then filtered in a desired manner by a bandpass filter 46, for example to include frequencies adjacent to the frequency band of operation. A splitter 48 divides the RF analog signals on the band edge detection path 18 and provides a replica of the RF spectrum on an upper edge detection path 50 and a lower edge detection path 52. On the upper edge detection

path 50, a mixer 54 mixes the RF analog signals with a signal from a local oscillator (LO) 56 to frequency convert the RF spectrum, for example to a lower frequency, for improved filtering and detection. The analog spectrum from the mixer 54 is provided to a bandpass filter 58 which passes an upper band edge bandwidth of frequencies from the upper band edge relative to the frequency band of operation and attenuates other frequencies, for example a surface acoustic wave (SAW) filter. The upper band edge bandwidth is provided to a power detector 60 which produces a signal indicating or representing the power level of the upper band edge bandwidth. A low pass filter 62 filters the signal from the power detector 60 to produce for the processing circuitry 22 a slower changing amplitude signal which represents the power level of the upper edge bandwidth.

[0013] On the lower edge detection path 52, a mixer 64 mixes the RF analog signals with a signal from a local oscillator (LO) 66 to frequency convert the RF spectrum, for example to a lower frequency, for improved filtering and detection. The analog spectrum from the mixer 64 is provided to a bandpass filter 68, such as a SAW filter, which passes a lower band edge bandwidth of frequencies relative to the frequency band of operation and attenuates other frequencies. The lower band edge bandwidth is provided to a power detector 70 which produces a signal indicating or representing the power level of the lower band edge bandwidth. A low pass filter 72 filters the signal from the power detector 70 to produce for the processing circuitry 22 a slower changing amplitude signal which represents the power level of the lower edge bandwidth. Thus, in this embodiment, the processing circuitry 22 receives signals indicating or representing the power levels of the upper and lower band edge bandwidths. Depending on the embodiment, additional band edge detection paths can be used to detect additional band edges if the receiver 10 operates within a changing frequency band of operation or operates within a fragmented or non-contiguous frequency band of operation between different cells and/or wireless communications systems. Additionally, depending on the frequency band of operation, the processing circuitry 22 can provide control signal to the LOs 56 and 66 to tune the LOs to different frequencies such that the band edge bandwidth can be changed.

[0014] On the main signal path 40 after the coupler 42, the RF analog signals are downconverted to an intermediate frequency (IF) by providing the spectrum to a mixer 80 which also receives a signal from a local oscillator (LO) 82. After passing through any additional IF stage 84, the spectrum of interest is further downconverted by providing the spectrum to a mixer 86 which also receives a signal from a local oscillator (LO) 88. The spectrum is then provided to the variable filter 34 which filters the spectrum as a function of the amplitude(s) at the band edge(s) adjacent to the frequency band of operation. The filtered signal is amplified by an amplifier 90, and in this embodiment, a bandpass filter 92

further filters the spectrum. In this embodiment, the analog spectrum is provided to the analog to digital (A/D) converter 35 for conversion into the digital domain. The analog signals are sampled and digital sample values are produced (from which a digital representation of the analog spectrum can be obtained) onto a bus 96 to processing circuitry 98 which can include digital down-converters (DDCs) and digital signal processors (DSPs) (as well as the processing circuitry 22). If the power level at the band-edge(s) relative to the frequency band of operation for the receiver 10 is above a certain level, for example from RF signal sources operating in adjacent frequencies and/or not under the control of the receiver 10, the power level at the band edges could saturate the A/D converter 94.

[0015] Depending on the embodiment, the processing circuitry 22 can provide control signals to the variable or tunable filter 34 as a function of the amplitude(s) at the band edge(s), of adjacent frequencies and/or of signals not under the control of the receiver 10 to attenuate the amplitude, such as the power, at the band edge(s). In addition to the power at the band edge(s), the processing circuitry 22 can change the filtering characteristics as a function of the amplitude, such as power level, of the frequency band of operation or a portion thereof. For example, the processing circuitry 22 can provide control signals to the variable filter 34 based on a comparison of the power level of band edge(s) and a power level of the frequency band of operation or a portion thereof. Depending on the embodiment, the analog power indicator 26a can include a coupler 100 which provides a replica of the frequency band of operation onto an analog power detection path 102 to a power detector 104. The power detector 104 provides a signal to the processing circuitry 22 which indicates or represents a power level for the frequency band of operation. Alternatively, the digital power level indicator 26b can include a portion of the processing circuitry 98 which provides a signal or value representing the power level of the frequency band of operation or a portion thereof to the processing circuitry 22 (which could be part of the processing circuitry 98). Thus, the band edge power reduction system can prevent the overload of the A/D converter 94 or interference within the operating bandwidth caused by signals from wireless units or RF signal sources operating in adjacent bands and/or not under the power control of the receiver 10.

[0016] FIG. 2 shows an alternative embodiment of a receiver 120 which uses an embodiment of the band edge reduction system which searches for overloading band edge signals after the last intermediate (IF) frequency stage. The receiver 120 receives radio frequency (RF) analog signals at the antenna 122 and the radio front end 124 onto a main signal path 126. The RF analog signals are down-converted to an intermediate frequency (IF) by providing the RF analog signals to a mixer 128 which also receives a signal from a local oscillator (LO) 130. After passing through a possible IF stage 132,

the spectrum of interest is further down-converted by providing the spectrum to a mixer 134 which also receives a signal from a local oscillator (LO) 136. After passing through a possible additional IF stage 140, a coupler 142 provides a replica of the analog signal spectrum on the main signal path 126 onto a band edge detection path 144 for band edge detection circuitry 146.

[0017] The band edge detection circuitry 146 receives the analog spectrum from the band edge detection path 144, and an amplifier 148 amplifies the analog signals on the path 144. The analog signals are then filtered in a desired manner by a bandpass filter 152. A splitter 154 divides the analog signals on the band edge detection path 144 and provides a replica of the spectrum on an upper edge detection path 160 and a lower edge detection path 162. On the upper edge detection path 160, the analog spectrum is provided to a bandpass filter 164, such as a SAW filter, which passes an upper band edge bandwidth of frequencies from the upper band edge relative to the frequency band of operation and attenuates other frequencies. The upper band edge bandwidth is provided to a power detector 166 which produces a signal indicating or representing the power level of the upper band edge bandwidth. A low pass filter 168 filters the signal from the power detector 166 to produce for processing circuitry 170, such as a micro-controller including an A/D converter, a slower changing amplitude signal which represents the power level of the upper edge bandwidth.

[0018] On the lower edge detection path 162, the analog spectrum is provided to a bandpass filter 172, such as a SAW filter, which passes a lower band edge bandwidth of frequencies from the lower band edge relative to the frequency band of operation and attenuates other frequencies. The lower band edge bandwidth is provided to a power detector 176 which produces a signal indicating or representing the power level of the lower band edge bandwidth. A low pass filter 178 filters the signal from the power detector 176 to produce for the processing circuitry 170 a slower changing amplitude signal which represents the power level of the lower edge bandwidth. Thus, in this embodiment, the processing circuitry 170 receives signals indicating or representing the power levels of the upper and lower band edge bandwidths, and as a function of the amplitude at the band edge(s), the processing circuitry provides control signals to change the filtering characteristics of a variable filter 180, for example to attenuate the power at the band edge(s). Depending on the embodiment, additional band edge detection paths can be used to detect additional band edges, for example if the receiver 120 operates within a changing frequency band of operation or operates within a fragmented or non-contiguous frequency band of operation between different cells and/or wireless communications systems.

[0019] On the main signal path 126 at the output to the coupler 142, the spectrum is then provided to the variable filter 180 which filters the spectrum as a function

of the amplitude(s) at the band edge(s), adjacent frequency band(s) and/or of signals not under the control of the receiver 120. In this embodiment, the analog spectrum is provided to an analog to digital (A/D) converter 182 for conversion into the digital domain. The analog signals are sampled and digital sample values are produced (from which a digital representation of the analog spectrum can be obtained) onto a bus 184 to processing circuitry 188 which can include digital down-converters (DDCs) and digital signal processors (DSPs) (as well as the processing circuitry 170). If the power level(s) at the band-edge(s) adjacent to the frequency band of operation for the receiver 120 is above a certain level, for example from a wireless unit operating in adjacent frequencies, the power level at the band edge(s) could saturate the A/D converter 182.

[0020] The processing circuitry 170 can provide control signals to the variable filter 180 as a function of the amplitude(s) at the band edge(s), at adjacent frequencies and/or of signals not under the control of the receiver 120 to attenuate the power at the band edge(s). In addition to the power at the band edge(s), at adjacent frequencies and/or of signals not under the control of the receiver 120, the processing circuitry 180 can change the filtering characteristics as a function of the amplitude, such as power level, of the frequency band of operation or a portion thereof. For example, the processing circuitry 170 can provide control signals to the variable filter 180 based on a comparison of the power level of band edge(s) and a power level of the frequency band of operation or a portion thereof. Depending on the embodiment, an analog power indicator 190a can include a coupler 192 which provides a replica of the frequency band of operation onto an analog power detection path 194 to a power detector 196. The power detector 196 provides a signal to the processing circuitry 170 which indicates or represents a power level for the spectrum of operation. Alternatively, the digital power level indicator 190b can include a portion of the processing circuitry 188 which provides a signal or value representing the power level of the frequency band of operation or a portion thereof to the processing circuitry 170 (which could be part of the processing circuitry 188). Thus, the band edge power reduction system can prevent the overload of the A/D converter 182 caused by signals from wireless units or RF signal sources operating in adjacent frequency bands and/or not under the power control of the receiver 120.

[0021] In alternative embodiments, the processing circuitry 170 can provide control signal(s) to control the variable filter 180 as a function of the amplitude of signals not under the control of the receiver 120, for example by comparing the amplitude of signals under the control of the receiver 120 and the total amplitude of signals within the frequency band of operation. Alternatively, the amplitude of signals not under the control of the receiver 120 can be assumed and cause a change in the filtering characteristics of the receiver 120 if the

processing circuitry 170 receives an indication of overload or saturation, for example by receiving an overload signal from the A/D 182. Furthermore, alternative embodiments for the variable filter 180 are possible for which the filtering characteristics can change using control signals from the processing circuitry 170.

[0022] In addition to the embodiment described above, alternative configurations of the band edge amplitude reduction system according to the principles of the present invention are possible which omit and/or add components and/or use variations or portions of the described receiver architecture. As would be understood by one of ordinary skill in the art, the various components making up the receiver architecture and their respective operating parameters and characteristics should be properly matched up to provide the proper operation. For example, an embodiment of the receiver system can be used to receive signals from a North American TDMA system, a Global System For Mobile Communication (GSM) system, a code division multiple access (CDMA) system or frequency division multiple access (FDMA) systems. Accordingly, the receiver according to the principles of the present invention can receive analog signals using different frequency bands or schemes. The analog signals can be characterized as wideband, broadband and/or narrowband. Additionally, the embodiments of the receiver according to the principles of the present invention have been described with frequency band(s) associated with base station receive frequencies, but the receiver architecture according to the principles of the present invention can be used in wireless units, such as mobile units, receiving information from other frequency band(s), such as a wireless unit receive band.

[0023] Furthermore, the receiver system has been described using a particular configuration of distinct components, but it should be understood that the receiver system and portions thereof can be implemented in application specific integrated circuits, software-driven processing circuitry, firmware, programmable logic devices, hardware or other arrangements of discrete components as would be understood by one of ordinary skill in the art with the benefit of this disclosure. Although in the illustrative embodiment is shown with a particular circuitry, the band edge amplitude reduction system can use different components which together perform similar functions when compared to the circuitry shown. What has been described is merely illustrative of the application of the principles of the present invention. Those skilled in the art will readily recognize that these and various other modifications, arrangements and methods can be made to the present invention without strictly following the exemplary applications illustrated and described herein and without departing from the spirit and scope of the present invention.

## Claims

### 1. A method of receiving signals, said method **CHARACTERIZED BY:**

changing filtering characteristics on a main signal path (40) as a function of at least one amplitude in an adjacent band relative to a frequency band of operation on said main signal path (40).

### 2. The method of claim 1 wherein said changing **CHARACTERIZED BY:**

using an amplitude in said frequency band of operation on said main signal path (40) to change said filtering characteristics on said main signal path (40).

### 3. The method of claim 1 **CHARACTERIZED BY:**

receiving analog signals on said main signal path (40);  
producing a replica of said analog signals on a band edge detection path (18);  
dividing said analog signals on said band edge detection path (18) onto an upper edge detection path (50) and a lower edge detection path (52);  
producing an upper edge amplitude for said analog signals at an upper edge relative to said frequency band of operation on said upper edge detection path (50) and a lower edge amplitude for said analog signals at a lower edge relative to said frequency band of operation on said lower edge detection path (52).

### 4. The method of claim 2 **CHARACTERIZED BY:**

providing a replica of analog signals on a detection path (102)  
producing an amplitude for said analog signals in said frequency band of operation on said detection path (102); and  
changing said filtering characteristics of said filter on said main signal path (40) based on a comparison between said at least one amplitude for said adjacent band and said amplitude for said frequency band of operation.

### 5. The method of claim 1 **CHARACTERIZED IN THAT** said changing comprises:

switching as a function of said at least one amplitude for said adjacent band between a plurality of filters (32a-b) having different filtering characteristics.

6. The method of claim 1 **CHARACTERIZED IN THAT** said changing comprises:

narrowing a bandwidth for a filter (24) on said main signal path to attenuate signals on at least one band edge of said frequency band of operation.

7. A method of receiving signals, said method **CHARACTERIZED BY:**

changing filtering characteristics on a main signal path (40) at least one band edge of a frequency band of operation of a receiver (10) depending on at least one amplitude for signals not under the control of said receiver (10).

8. The method of claim 7 **CHARACTERIZED IN THAT** said changing comprises:

using an amplitude of said frequency band of operation on said main signal path (40).

9. The method of claim 7 **CHARACTERIZED BY:**

receiving analog signals on said main signal path;  
producing a replica of said analog signals on a band edge detection path (18);  
dividing said analog signals on said band edge detection path onto an upper edge detection path (50) and a lower edge detection path (52);  
producing an upper edge amplitude for said analog signals at an upper edge relative to said frequency band of operation on said upper edge detection path (50) and a lower edge amplitude for said analog signals at a lower edge relative to said frequency band of operation on said lower edge detection path (52).

10. The method of claim 9 comprising:

providing a replica of said analog signals on a detection path (102);  
producing an amplitude for said analog signals in said frequency band of operation on said detection path (102); and  
changing said filtering characteristics of said filter (24) on said main signal path (40) based on a comparison between said at least one amplitude for said signals not under the control of said receiver and said amplitude for said frequency band of operation.

11. A band edge amplitude reduction system for a receiver

**CHARACTERIZED BY:**

a variable filter (24) on a main signal path (40);  
and  
processing circuitry (22) changes filtering characteristics of said variable filter (24) as a function of at least one amplitude for an adjacent band and/or signals not under the control of said receiver (10).

12. The system of claim 11 wherein said processing circuitry (22) changes said variable filter characteristics on said main signal path (24) as a function of at least one amplitude for said adjacent band and/or said signals not under the control of said receiver and an amplitude for said frequency band of operation on said main signal path (40).

13. The system of claim 11 **CHARACTERIZED IN THAT** said processing circuitry (22) produces control signals to change said filtering characteristics of said variable filter (24) by switching between a plurality of filters (32a-b) having different filtering characteristics as a function of said at least one amplitude for said adjacent band and/or said signals not under the control of said receiver (10).

14. The system of claim 11 **CHARACTERIZED IN THAT** said processing circuitry (22) produces control signals to narrow a bandwidth for said variable filter (24) on said main signal path (40) to attenuate signals on at least one band edge of said frequency band of operation.

FIG. 1


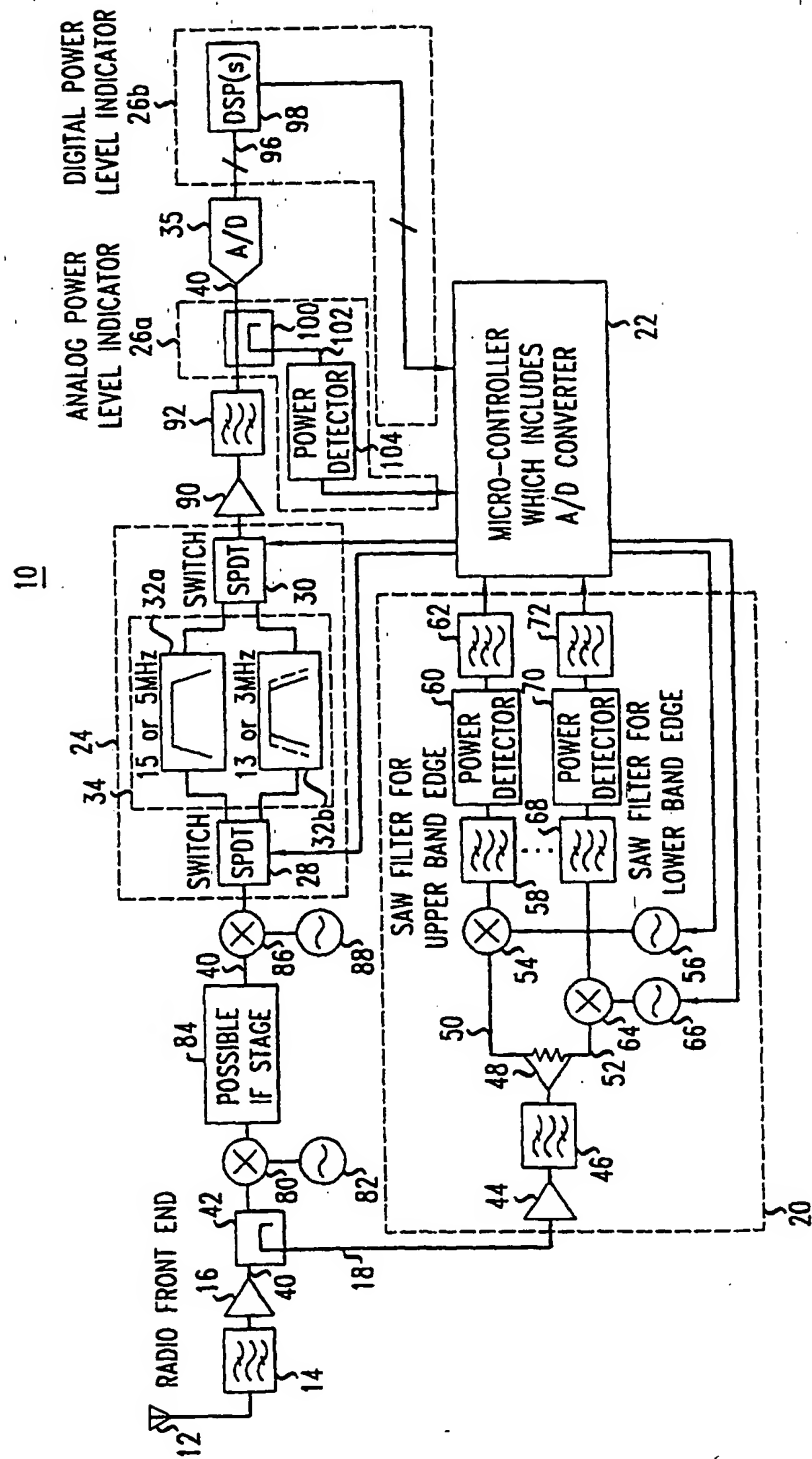




FIG. 2

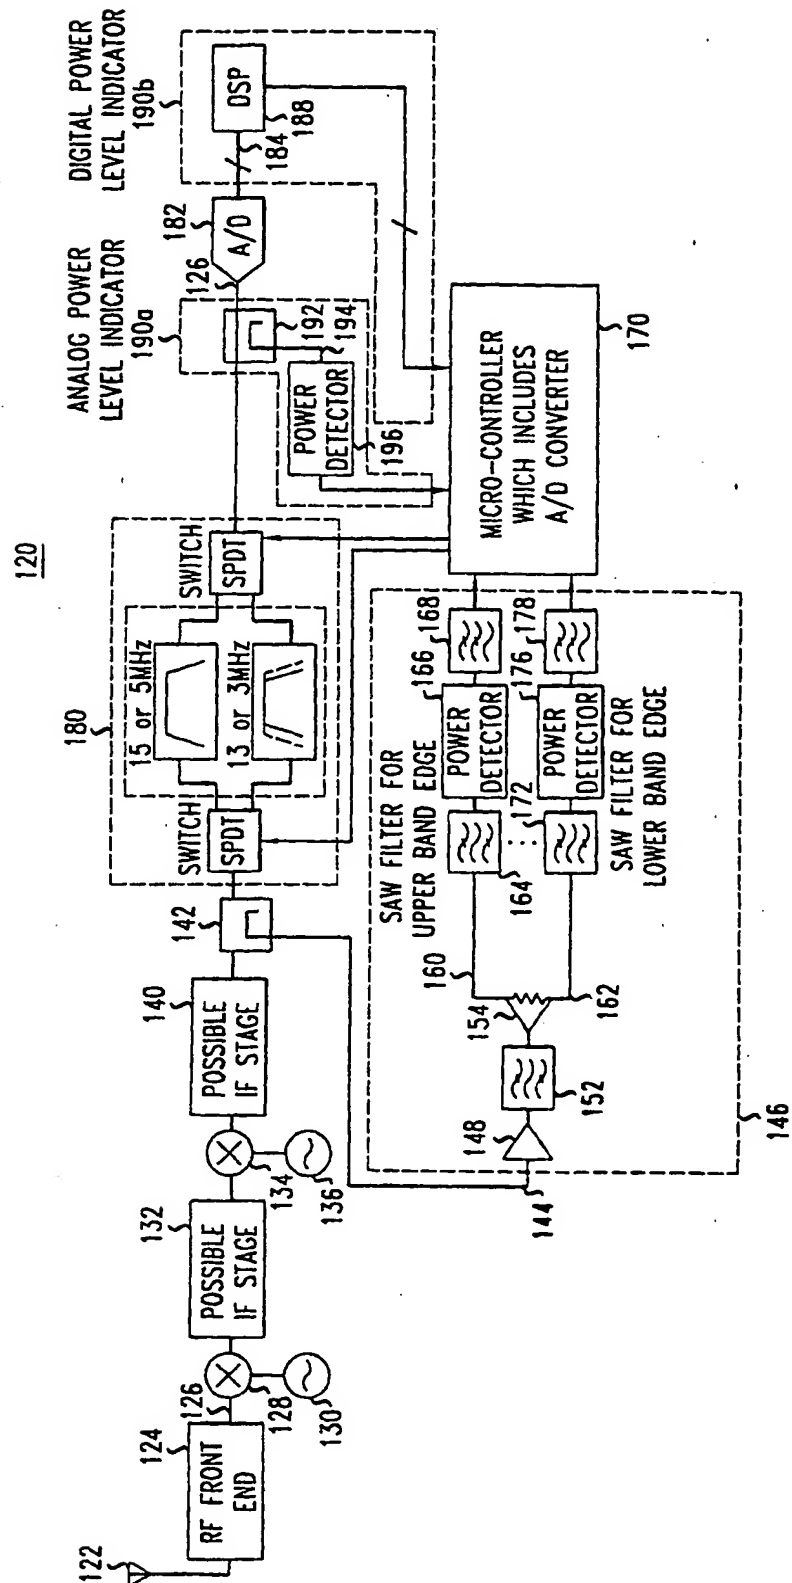

European Patent  
Office

## EUROPEAN SEARCH REPORT

Application Number  
EP 01 30 1959

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X	EP 0 410 663 A (BOSE CORP) 30 January 1991 (1991-01-30)	1,2,5,7, 8,11-14	H04B1/10
Y	* abstract; figure 1 *	3,4,9,10	
A		6	
X	EP 0 715 417 A (NIPPON ELECTRIC CO) 5 June 1996 (1996-06-05)	1,2,5-7, 11-14	
A	* column 3, line 21 - line 59; figure 1 *	3,4,8-10	
Y	US 5 603 110 A (HEINZMANN GUSTAV) 11 February 1997 (1997-02-11)	3,4,9,10	
A	* abstract; figures 1,4,7 *	1,2,5-8, 11-14	
A	US 5 097 221 A (MILLER JEFFRY J) 17 March 1992 (1992-03-17)		
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 11 July 2001	Examiner Andersen, J.G.
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	

EPO FORM 1503 03.82 (P04001)

**ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.**

EP 01 30 1959

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

11-07-2001

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 0410663	A	30-01-1991	US 5008939 A	16-04-1991
			AT 126635 T	15-09-1995
			CA 2020901 A	29-01-1991
			DE 69021665 D	21-09-1995
			DE 69021665 T	01-02-1996
			JP 2995077 B	27-12-1999
			JP 3143030 A	18-06-1991
EP 0715417	A	05-06-1996	JP 8154062 A	11-06-1996
			AU 695017 B	06-08-1998
			AU 3911295 A	06-06-1996
			CA 2163952 A	29-05-1996
			US 5758296 A	26-05-1998
US 5603110	A	11-02-1997	DE 4038405 A	11-06-1992
			AT 113428 T	15-11-1994
			WO 9210039 A	11-06-1992
			DE 59103373 D	01-12-1994
			EP 0559716 A	15-09-1993
			JP 7112177 B	29-11-1995
			JP 6500444 T	13-01-1994
			KR 235785 B	15-12-1999
US 5097221	A	17-03-1992	NONE	

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

**THIS PAGE BLANK (USPTO)**